

# PLENTICORE plus

Hybrid inverter - G2 3.0-10 kW



Data sheet

# PLENTICORE plus G2: The new standard – versatile and smart

## All-in-one

- PV hybrid inverter with battery input with optional activation code <sup>1, 2)</sup>
- Compatibility with various high-voltage batteries <sup>2)</sup>
- 3 MPP trackers suited to the layout of almost all roofs
- Extended MPP range – perfect for repowering
- 15 A MPP current: Prepared for the latest generation of modules

## Smart connected

- Smart Communication Board: control interfaces integrated as standard
- Display, data logger and system monitoring
- Free Solar Portal for monitoring the PV system
- 2 x LAN, WiFi, 4 x digital switching outputs for self-consumption control or event reporting, „SG Ready“ compatible, Evaluation of external overvoltage protection modules
- Modbus/SunSpec (TCP)
- EEBus




## Smart performance

- Fast, self-learning shadow management – adapts individually to the installation site
- Dynamic active power control and 24-hour home-consumption measurement <sup>2)</sup>
- Self-learning generation and consumption forecast – for optimum self-consumption <sup>2)</sup>
- Low conversion losses due to DC coupling and high-voltage battery
- Prepared for additional battery charge via AC energy sources <sup>2)</sup>

## Easy to install

- Simple device configuration using commissioning wizard via display or smartphone
- Safe installation due to clearly arranged, separate terminal compartment with Push-In terminals and protected power electronics
- Compatible with RCD type A
- Auto Update: Always at the cutting edge of technology

# PLENTICORE plus G2: compact and rapidly deployable

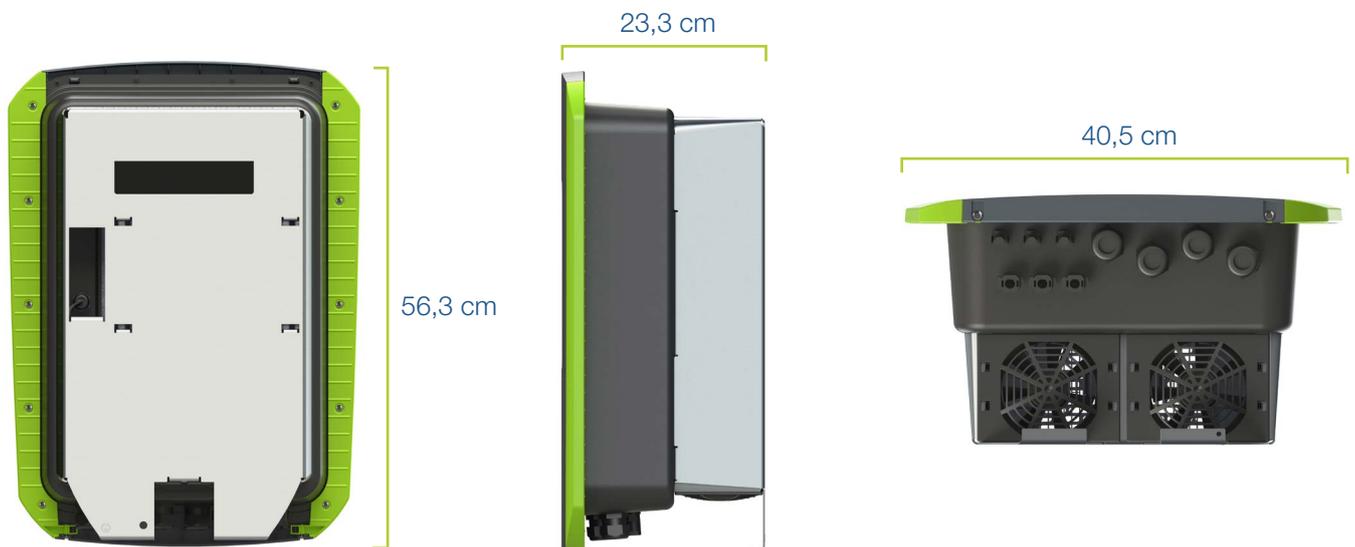

<sup>1)</sup> Activation code battery available at: [shop.kostal-solar-electric.com](http://shop.kostal-solar-electric.com)

<sup>2)</sup> Compatible energy meter required (see document Released energy meters in the download area for the product)



PLENTICORE plus G2		3.0	4.2	5.5	7.0	8.5	10	
System data	Topology: Without galvanic isolation – transformerless	yes						
	Protection class according to IEC 60529	IP 65						
	Protective class according to IEC 62103	I						
	Overvoltage category according to IEC 60664-1, input side (PV generator)	II						
	Overvoltage category according to IEC 60664-1, output side (grid connection)	III						
	Degree of contamination	4						
	Environmental category (outdoor installation)	yes						
	Environmental category (indoor installation)	yes						
	UV resistance	yes						
	AC cable diameter (min-max)	mm	8...17					
	AC cable cross-section (min-max)	mm <sup>2</sup>	1.5...6		2.5...6		4...6	
	DC cable cross-section (PV/BAT) (min-max)	mm <sup>2</sup>	2.5...6 / 4...6					
	Max. fuse protection on output side		B16/C16				B25/C25	
	Internal operator protection according to EN 62109-2 (compatible with RCD type A from FW 01.14)		yes					
	Independent disconnection device according to VDE 0126-1-1		yes					
	Height/width/depth	mm (in)	563/405/233 (22.17 / 15.94/9.17)					
	Weight	kg (lb)	19.6 (43.21)			21.6 (46,62)		
	Cooling principle – regulated fans		yes					
	Max. air throughput	m <sup>3</sup> /h	184					
	Noise emission (typical)	dB(A)	39					
	Ambient temperature	°C (°F)	-20...60 (-4...140)					
	Max. installation altitude above sea level	m (ft)	2000 (6562)					
	Relative humidity	%	4...100					
	Connection technology, DC side		SUNCLIX plug					
	Connection technology, AC side		Spring-type terminal strip					
	Connection technology, interfaces		Push-In terminal					
Interfaces	Ethernet LAN (RJ45) / WiFi (IEEE 802.11b/g/n 2.4GHz)	2 / yes						
	Connection of energy meter for collecting energy data (Modbus RTU)	1						
	Digital inputs	Ripple control receiver or external battery control, CEI, OVP monitoring						
	Digital outputs	4 (24 V, 100 mA)						
	Webserver (user interface)	yes						
	Warranty (Smart Warranty / Smart Warranty plus <sup>1)</sup> )	Years	10 (5 + 5)					
Directives/Certification		CE, GS, CEI 0-21, C10/11, EN 62109-1, EN 62109-2, EN 60529, EN 50438 <sup>2)</sup> , EN 50549-1 <sup>2)</sup> , NA/EEA, G98, G99, EIFS2018, IEC 61727, IEC 62116, RD 1699, RD 647, RFG, TF3.3.1, TOR Erzeuger, UNE 206006, UNE 206007-1, VDE 0126-1-1, VDE-AR-N 4105, VJV2018						

Subject to technical changes. Errors excepted. You can find current information at [www.kostal-solar-electric.com](http://www.kostal-solar-electric.com). Manufacturer: KOSTAL Industrie Elektrik GmbH, Hagen, Germany

<sup>1)</sup> Activate your free warranty (Smart Warranty) now in the KOSTAL Solar online shop ([shop.kostal-solar-electric.com](http://shop.kostal-solar-electric.com)). This does not affect your statutory warranty. You will find more information about the service and warranty conditions in the download area for your product.

<sup>2)</sup> Does not apply to all national annexes

<sup>3)</sup> MPP range at rated output: Outside the MPP range, MPP control takes place below the nominal power. Based on full occupancy of all MPP trackers.

<sup>4)</sup> Working voltage range: No feed-in takes place outside the working voltage range.


<sup>5)</sup> From SW 02.20

# PLENTICORE plus G2 available in 6 power classes




- 3.0
- 4.2
- 5.5
- 7.0
- 8.5
- 10


## PLENTICORE plus 3.0 G2

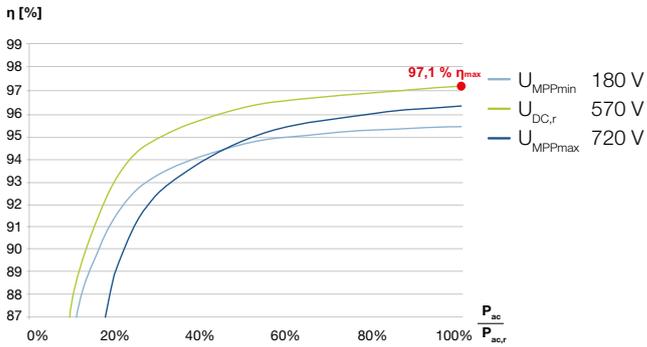


## PLENTICORE plus 4.2 G2

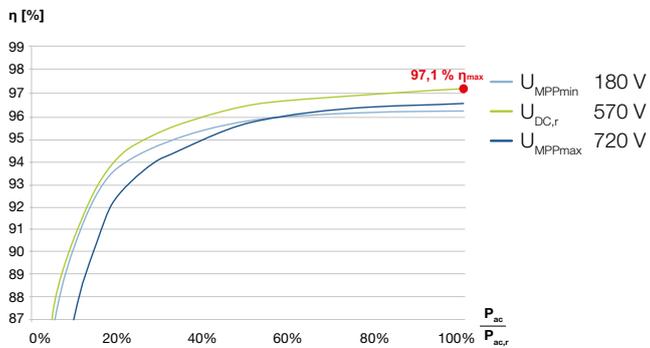


## PLENTICORE plus 5.5 G2

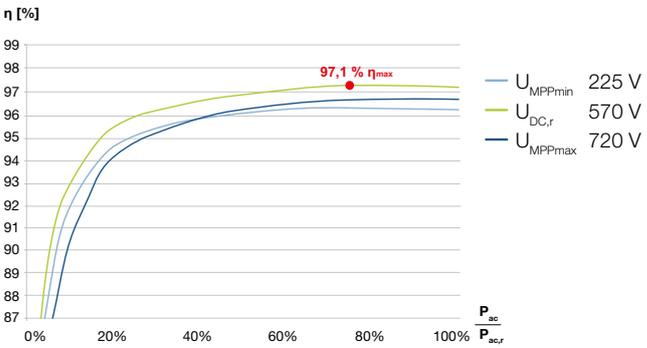


## PLENTICORE plus 7.0 G2

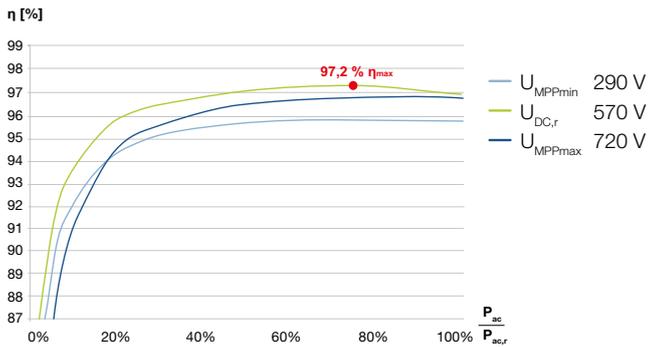

## PLENTICORE plus 8.5 G2

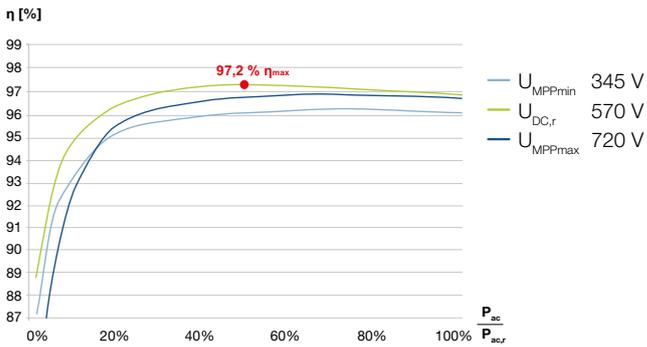

## PLENTICORE plus 10 G2

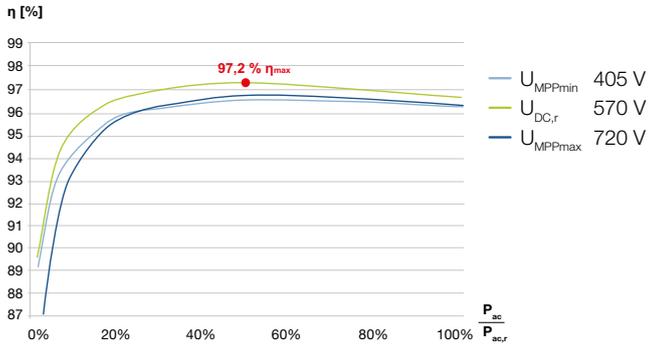

### Services for our products

FAQs:  
[kostal-solar-electric.com/Service\\_Support](http://kostal-solar-electric.com/Service_Support)

Product registration, KOSTAL Smart Warranty, warranty extension, battery activation code or purchase of accessories: [shop.kostal-solar-electric.com](http://shop.kostal-solar-electric.com)

Get in touch: [service-solar@kostal.com](mailto:service-solar@kostal.com)

